

# DCB

## Color blackbody

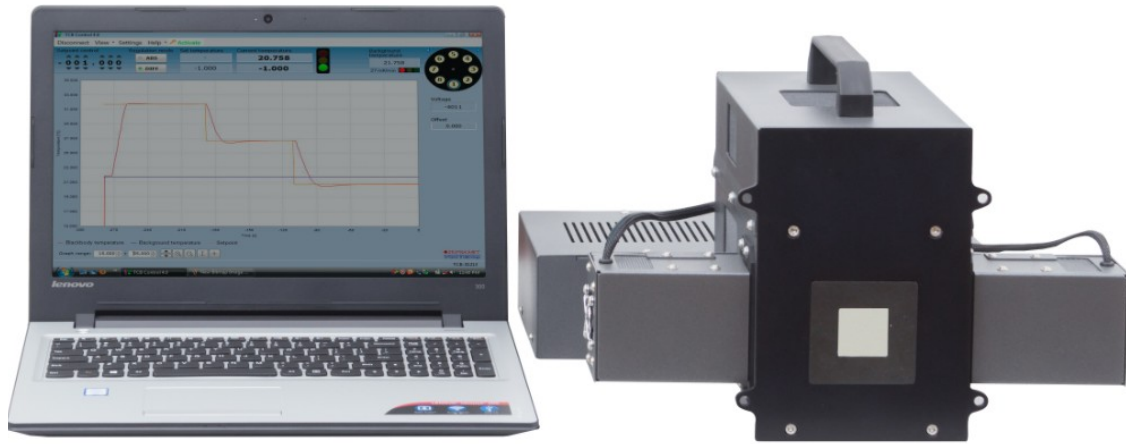


Fig.1. Photo DCB -2D-SEM2 color blackbody

### BASIC INFORMATION:

DCB dual-color blackbody is a broadband reference source of optical radiation having emitter module that simultaneously reflects light emitted by an external shortwave light source (source emitting in range from UV to SWIR) and emits longwave thermal radiation in MWIR-LWIR region. The name originates from the fact that it works like a typical blackbody in middle/far infrared range but its emitter appear to be white from middle UV range to middle SWIR range.

DCB color blackbody is built by combining slightly modified (different emitter) TCB differential area blackbody with an exchangeable external light source. A series of light sources can be used as emitters of short wave light (multi-LED, halogen, optional xenon) depending on desired spectral band of emitted light.

Design of DCB color blackbody is based on patent pending technology developed by Inframet.

In general DCB color blackbody belongs to a group of broadband radiation sources called fused blackbodies that are offered on international market from several vendors. However DCB color blackbody significantly exceeds performance of similar devices.

In contrast to typical fused blackbodies DCB color blackbody can emit high intensity light in wide spectral band (from middle UV to middle SWIR) behaving at the same time as near perfect blackbody (emissivity over 0.95) in MWIR-LWIR spectral band. The competing fused blackbodies emit light of several times lower maximum luminance at narrow light spectrum and have emitters of lower emissivity at MWIR-LWIR band.

### VERSIONS

DCB color blackbodies are modular systems offered in form of a series of versions that differ in blackbody emitter area and type of attached light source. Both emitter size and type of light source are indicated by code of DCB blackbody. The code is DCB -XD-Type where X is approximate size of square of the emitter in inches and Type is type of the light source. Following emitters are available: 2D, 6D and 8D. Next, five standard light sources SEM0, SEM1, SEM2, HAL and XEN are offered:

- 1) SEM0 – light source that emits light having spectrum of roughly 4000K temperature greybody in crucial part of visible band: 450-630nm. Luminance of this light source is non-regulated.
- 2) SEM1– light source that emits light having spectrum of roughly 5000K temperature greybody in crucial part of visible band: 450-630nm (see Fig.2). It can be treated as improved typical white LED source.
- 3) SEM2 – light source that emits light of 5000K temperature greybody spectrum in total VIS band and most of NIR band: 400-850 nm (the spectral band can be expanded) - see Fig.3
- 4) HAL – light source that emits broadband polychromatic light in VIS-SWIR range. Spectrum of 2856K color temperature in VIS-NIR range (Fig.4).
- 5) XEN – light source built using opto-mechanically controlled xenon bulb that emits light of quasi typical xenon spectrum in in approximate 300 nm to 1100nm band (spectrum can be optionally extended) - see Fig.4.

Code of most popular model is DCB -2D-SEM2. It means emitter size equal to 2” and SEM2 light source is used.

# DCB

## Color blackbody

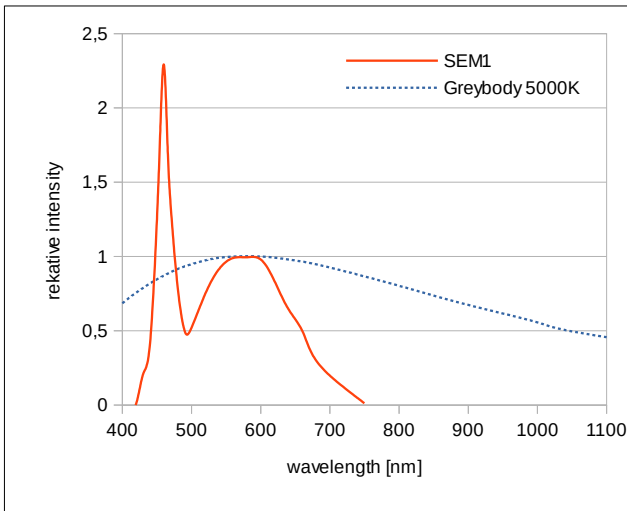


Fig.2. Relative spectrum of SEM1 light source

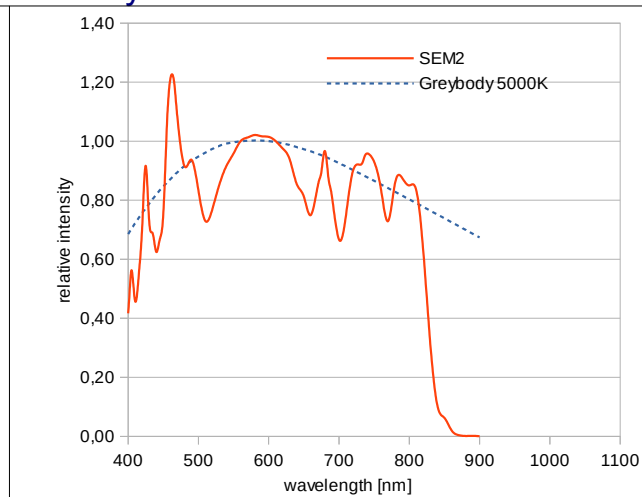


Fig.4. Relative spectrum of SEM2 light source

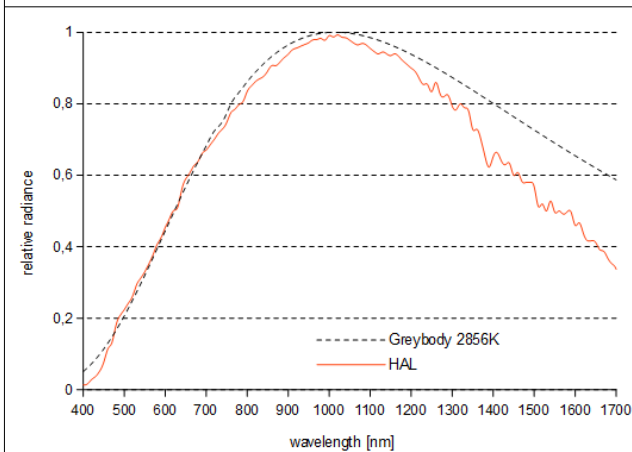


Fig.3. Relative spectrum of HAL light source

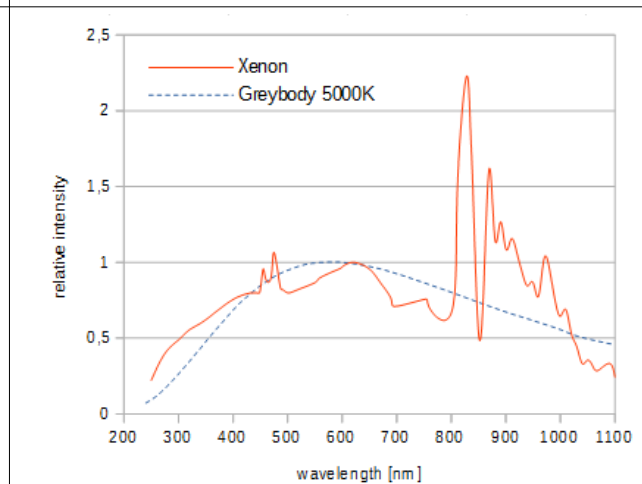


Fig.4. Relative spectrum of XEN light source

### OPTIONS

1. Typical DCB color blackbodies use four types of light sources of spectrum seen in Figs. 2-4. However light sources of different spectrum can be optionally delivered, too.
2. Typical DCB color blackbodies are manufactured to simulate day light conditions. However, they can be delivered in version of expanded light intensity range capable to simulate both day and night light conditions.
3. Typical DCB color blackbody emits polychromatic broadband light and is calibrated in photometric units. However, special DCB blackbody emitting monochromatic light can be delivered. Such color blackbody is calibrated in radiometric units.

# DCB

## Color blackbody

### SPECIFICATIONS

DCB color blackbody is typically offered with 2" emitter size and the specification below refer to DCB-2D model.

Table 1. Parameters of DCB -2D blackbodies

Parameter	Value
<i>Blackbody mode</i>	
Active aperture	35x35 mm
Emitter size	50× 50 mm
Absolute temperature range	0°C ÷ +100°C at 25°C ambient temperature
Differential temperature range	-25°C ÷ + 75 °C
Effective emissivity	0.95±0.01 at MWIR, 0.96±0.01 at LWIR 0.98±0.05 for SEM0
Temperature spatial distribution uncertainty (temperature uniformity)	<0.01 °C or 0.4% of ΔT
Set point and resolution	1 mK
Regulation stability	±3 mK @ ΔT=10°C
Total temperature uncertainty	Abs(T-25°C)+12[mK]
Heating rate <sup>2</sup>	0.8°C/sec
Cooling rate	0.3°C/sec
Settling time	<30sec
<i>Light source mode</i>	
Active aperture	35x35 mm
Approximate spectral band	420-650nm – SEM0; 420-750nm – SEM1; 380-850nm – SEM2; 350 -1700nm – HAL version 300-1100nm – XEN version
Luminance range	non regulated about 70cd/m <sup>2</sup> – SEM0 at least 0.2 to 2000cd/m <sup>2</sup> – SEM1/SEM2/XEN at day option at least 0.0002 to 2000cd/m <sup>2</sup> – SEM1/SEM2/XEN at day/night option at least 0.1 to 800cd/m <sup>2</sup> – HAL at day option at least 0.0001 to 800cd/m <sup>2</sup> – HAL at day/night option
Spectrum of light source	As in Figs. 2-4
<i>Other parameters</i>	
Computer control	USB 2.0
Power supply	115-230VAC 50/60Hz
Operating temperature	+5°C ÷ +45°C (non condensing)
Storage temperature	-10°C ÷ +60 °C
Dimensions	About 50x31x34
Mass	9-14 kg depending on version

### SUMMARY

DCB color blackbody is a perfect solution for a broadband reference source in systems for testing multi-sensor/fused surveillance systems eliminating need for mechanical exchange of typical blackbody with typical light source and making the test system more compact, lighter and more reliable. Next, performance parameters of DCB color blackbody significantly exceed parameters of similar radiation sources offered on international market.

*Version 5.1*

### CONTACT:

Tel: +48 22 6668780

Fax: +48 22 3987244

Email: [info@inframet.com](mailto:info@inframet.com)